

# ALL-IN-ONE WIRELESS O INDOOR & OUTDOOR SPEAKER



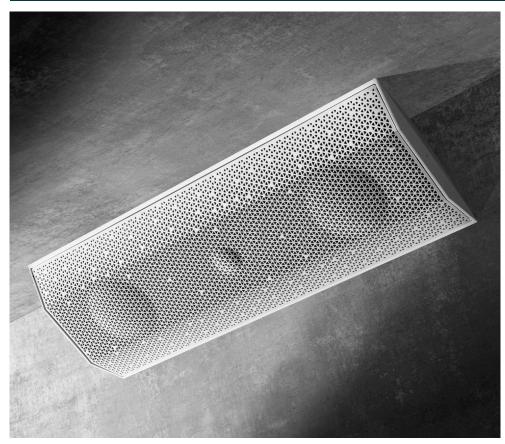

### ACTIVE SURFACE MOUNT SPEAKER

The iO1 speaker can be used indoors and outdoors with 6 different orientations. Connect to the speakers wirelessly or via a data cable. With a powerful amplifier and connectivity all built in, this active surface mount speaker delivers premium audio quality and ease of install in one versatile package.

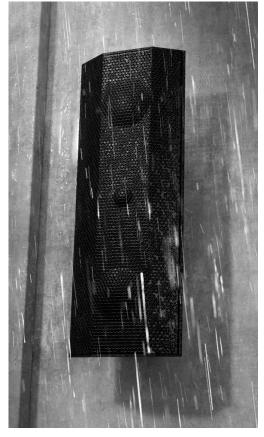






























### LIMITLESS INSTALL POSSIBILITIES
















## ALL-IN-ONE SYSTEM. JUST ADD POWER.

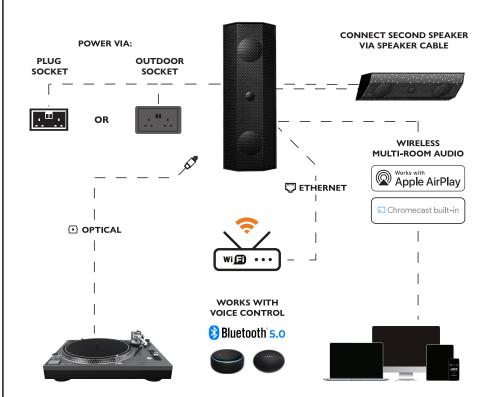

## ONE SPEAKER. SIX WAYS.

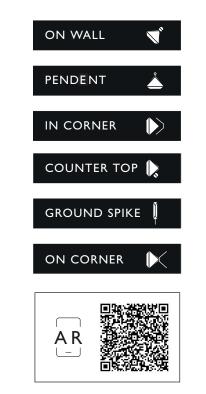

#### Features

#### Outdoor Rated to Impressive IPX6

Weather Resistant IPX6 rated protection is extremely waterproof, impenetrable by weather, high pressure jets of water and even a non-sustained total soaking

#### All-In-One Solution

Amplifier and Wi-Fi all built-in, just add power

#### Place Anywhere

Mount 6 different ways to suit your install requirement

#### Built-in AirPlay 2 and Google Chromecast

Stream music directly from your Smart Phone / Tablet using Bluetooth or control multiple rooms at the same time

#### Easy Connection

Connect to plug socket or existing light circuit or any power source available 230V or 110V supply

#### Multi-Room Audio

Connect multiple iO1's and Lithe Audio Ceiling Speakers for a whole home, indoor and outdoor audio experience

#### Dynamic Sound

Fully Adjustable EQ via Lithe App to deliver fine tuned optimal sound

#### Choice of Connectivity

Wireless and Wired Connections to use with any streaming service or cabled equipment

#### Accessories available

**06851** Power Extension Lead 5m

06850 16AWG Speaker Cable 7m

06840 IO1 Garden Spike Black (single)

06841 IO1 Garden Spike White (single)

06852 IO1 Eyelet Kit (Single)

#### Audio Spec

RMS Power: 100W RMS (2x 50W)

Frequency Response (-3dB) 55Hz - 20KHz

Frequency Range (-10dB) 60Hz - 20KHz

Impedance: 4 Ohms nominal (8 8)

Sound Quality THD+N < 0.01%

Sensitivity (1W/1m): 82dB

Coverage: Vertical 180 degree / Horizontal 120 degree

Type: Class D (Digital)

Audio Compression: 192kHz / 24 bits

#### Connectivity

Wi-Fi certified 2.4Ghz / 5Ghz (802.11a/b/g/n/ac)

10/100 Ethernet Ports (In/Out) (For hardwire connection)

Apple AirPlay 2 and Google Chromecast

Spotify Connect

Bluetooth 5.0

Works with OK Google

Line In (Optical), auto-detecting

Passive speaker output

#### SKU Codes

**06800** IO1 WiFi Speaker (Single) - Black

06801 IO1 WiFi Speaker (Single) - White

06810 IO1 WiFi Speaker (Pair) - Black

**06811** IO1 WiFi Speaker (Pair) - White

#### Speaker Spec

Dimensions: (H  $\times$  W  $\times$  D) 465  $\times$  170  $\times$  100mm (18.3  $\times$  6.7  $\times$  3.9 inches)

Power Input Supply: 100 - 240V, 50/60Hz / 2.5A

Colour: Matt Black or White

Woofer: 2 x 3" Waterproof Coated Paper Cone

Tweeter: 0.75" Waterproof Coated Silk Dome

Operating Temperature: -10C to 50C (-50F - 122F)

Storage Temperature: -20C to 60C (-68F - 140F)

Net Weight: 2.7kg (6lbs) (Single)

Shipping Weight: 9.5kg (20.94lbs) (Pair)

IP Rating: IPX6

Housing Material: ABS+PC (UL f1/f2 Certification Standard

UL746C-V0)

Grille: Aluminium (UV Powder Coating)

#### What's in the box

IO1 Surface Mount Speaker

16 AWG Tin Coated Copper Cable (included with Pair only)

Power Supply

Mounting Bracket

Instruction Manual

**06820** IO1 Passive Speaker (Single) - Black

06821 IO1 Passive Speaker (Pair) - Black


06830 IO1 Passive Speaker (Single) - White

06831 IO1 Passive Speaker (Pair) - White



#### Speaker Dimensions:

Dimensions in mm (inches)

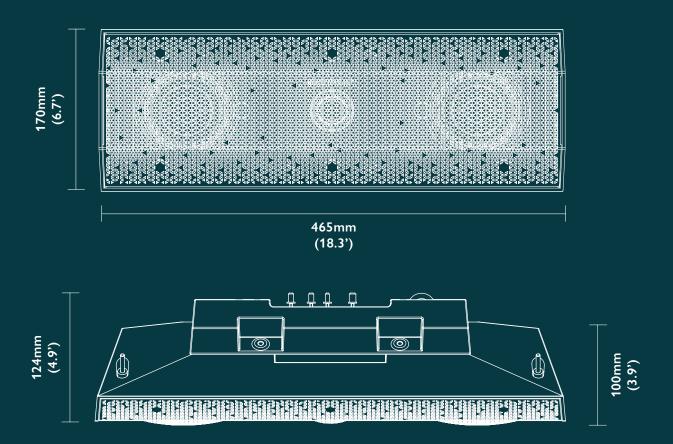

#### **Bracket Dimensions:**

Dimensions in mm (inches)

